

INDUSTRIAL COMPUTER KEYBOARD - MEMBRANE

MODEL : LP1828



Main Feature

- Thin and slim
- Stand alone / Control Panel
- -50°C to 80°C - Storage Temp
- -20°C to 70°C - Operation Temp
- Life of keys : Over 5 Million
- 103 keys QWERTY style membrane keyboard
- Water proof / Spill proof / Oil or grease proof
- Key activation force 200 to 350 gms depending on switching element

Options

- PS2 or USB interface
- Touch Pad or Track Ball


Application

- Process Control Panel
- Point of Sales
- Information Kiosk
- Public Utility
- Defence Systems

TOP VIEW

SIDE VIEW

M3X8 STUD

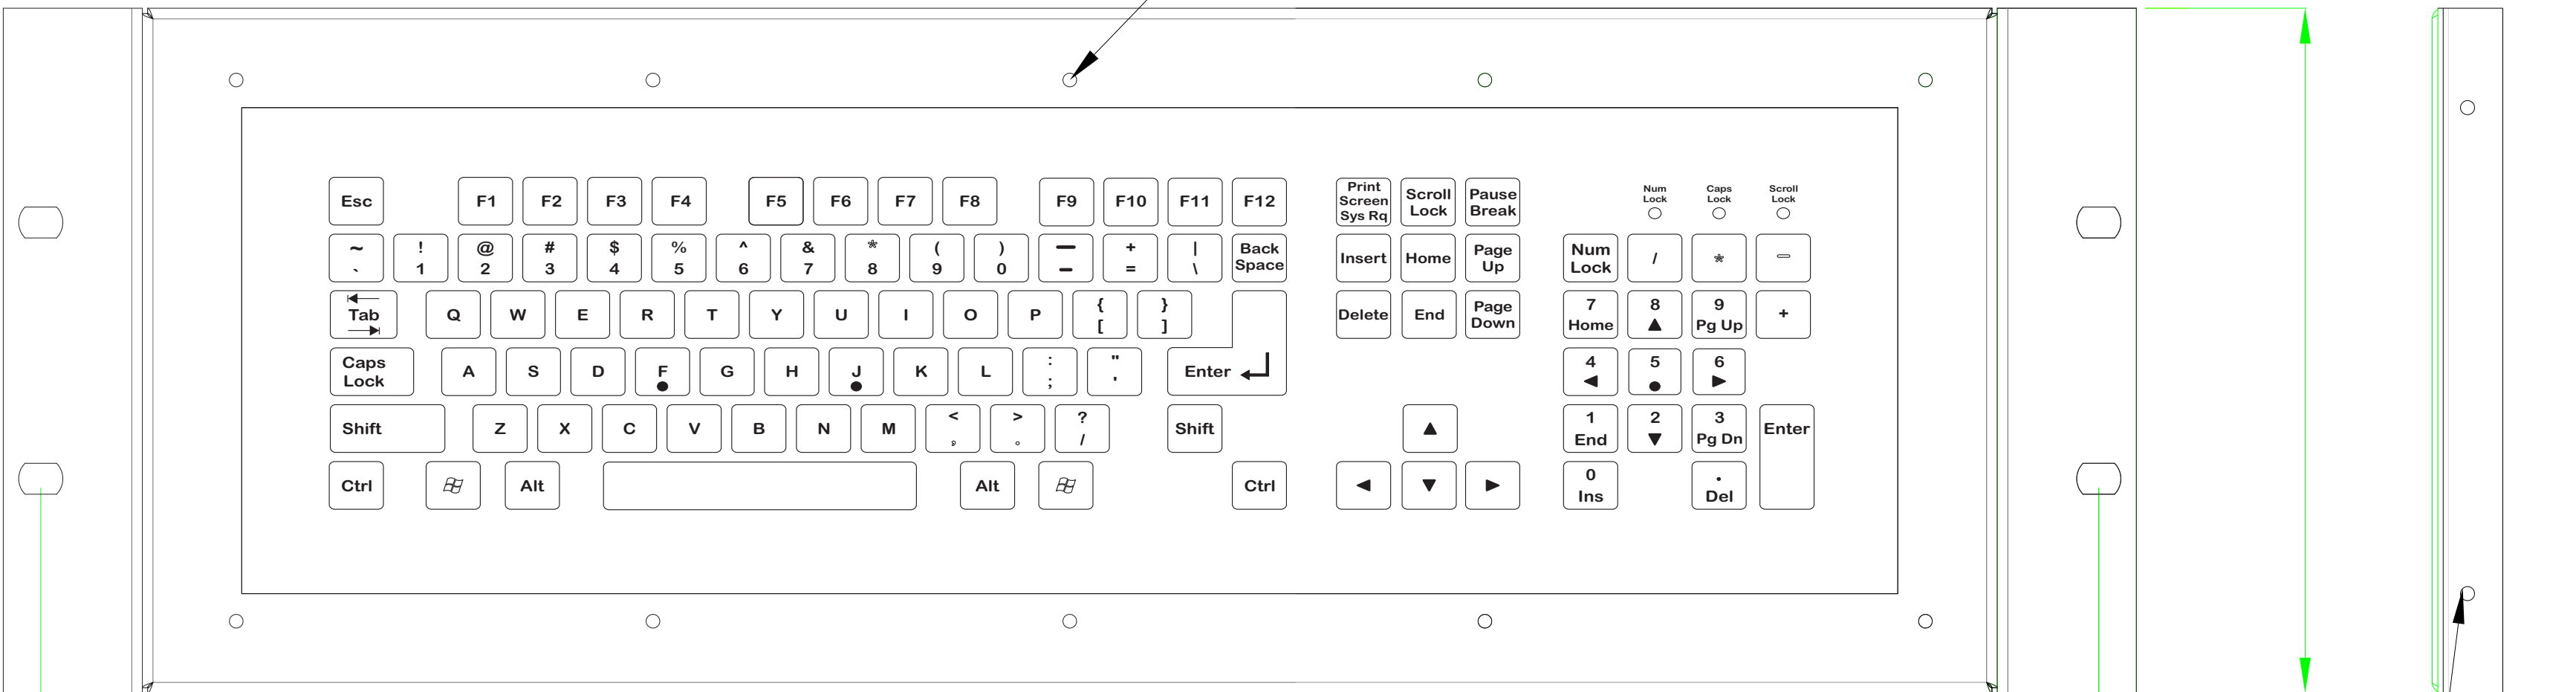

420



466

483

16

M3 REVETING NUT

REVETING NUT

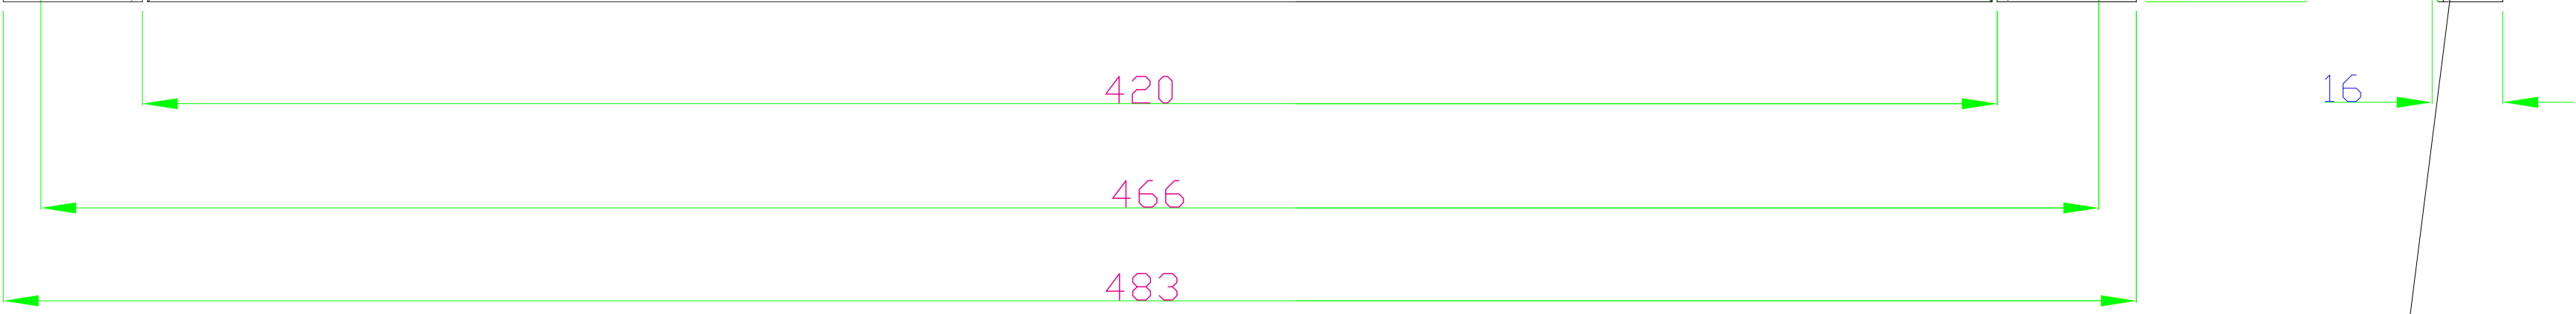

SECTION A-A

FRONT VIEW